


## HIGH PERFORMANCE DOOR "GLG"


## FOOD&PHARMA

"GLG" since 1983 gamina has been manufacturing high speed doors, offering a wide range of high quality products, simple to install, reliable and long lasting and always delivered on time. Self repositioning high speed roll-up door "Food&Pharma", for environments subject to sanitization. Easy setting with digital control panel with Multilanguage Display. Door structure in Polyethylene and Stainless Steel with safety devices IP67 rated able to be washed and sanitized in the food industry. Safety photocells or Active Light Curtain for a fully safe operation that avoid contact with curtain during door closing. The sliding system of the curtain guarantees perfect isolation between the exterior and interior.

- Performance of 1.000.000 cycles
- 100 % self repairing
- Opening/closing speed 2,2/0,8 m/s
- Extra strong 950gr/sgm. polyster curtain
- Stainless steel door structure
- Washable and sanitizable
- Easy setting with digital control panel
- Fully safe operation with safety photocells

## THE MOTOR IS ALWAYS ON THE SIDE

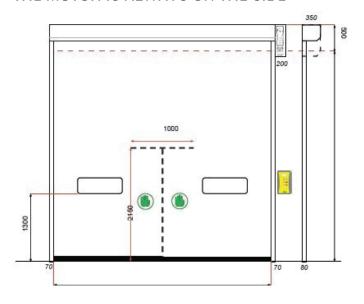

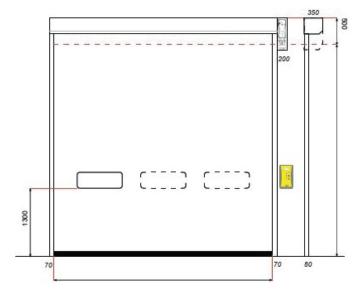

## **SPECIFICATIONS**

| Product name            | FOOD&PHARMA  |
|-------------------------|--|
| Intended use            | Food industry  |
| Max. dimensions, mm     | 5000 x 5000 mm <sup>1</sup>  |
| Opening speed           | Up to 2,2 m/sec (adjustable) Soft Start & Soft Landing   |
| Closing speed           | 0,8 m/sec (adjustable) Soft Start & Soft Landing   |
| Resistance to wind load | UNI EN 12-424 Class 2  |
| Power supply            | 230V AC Single phase   |
| PVC Curtain             | Polyester curtain extra strong 950 gr/sqm flame retardant. ZIP type side sliding system without rigid bar  |
| Guarantee               | 2 years  |
| Performance             | 1.000.000 ycles  |
| Standard colours, RAL   | 3002, 5010, 2004, 7035, 7038, 7037, 1013, 9003, 9006, 9002 , 5012, 9005, 7016, 5015, 5002, 6005, 6026, 6018, 1003, 1021  |
| Kit                     | One pair of photocells IP67, door structure stainless steel and polyethylene PE500 (perfect for frequent washing), button, flashing light, side motor, manual release, 230V drive with frequency converter, control unit with multilingual display for easy programming (speed setting, pedestrian opening, service) |

<sup>1</sup>Other dimension upon request.



Phone.: +370 37 308 900 | Email.: info@idomus.lt | www.idomus.lt