



Rail sliding manual ramp
perfect for long bays
and loading with transpallets/little wheels vehicles

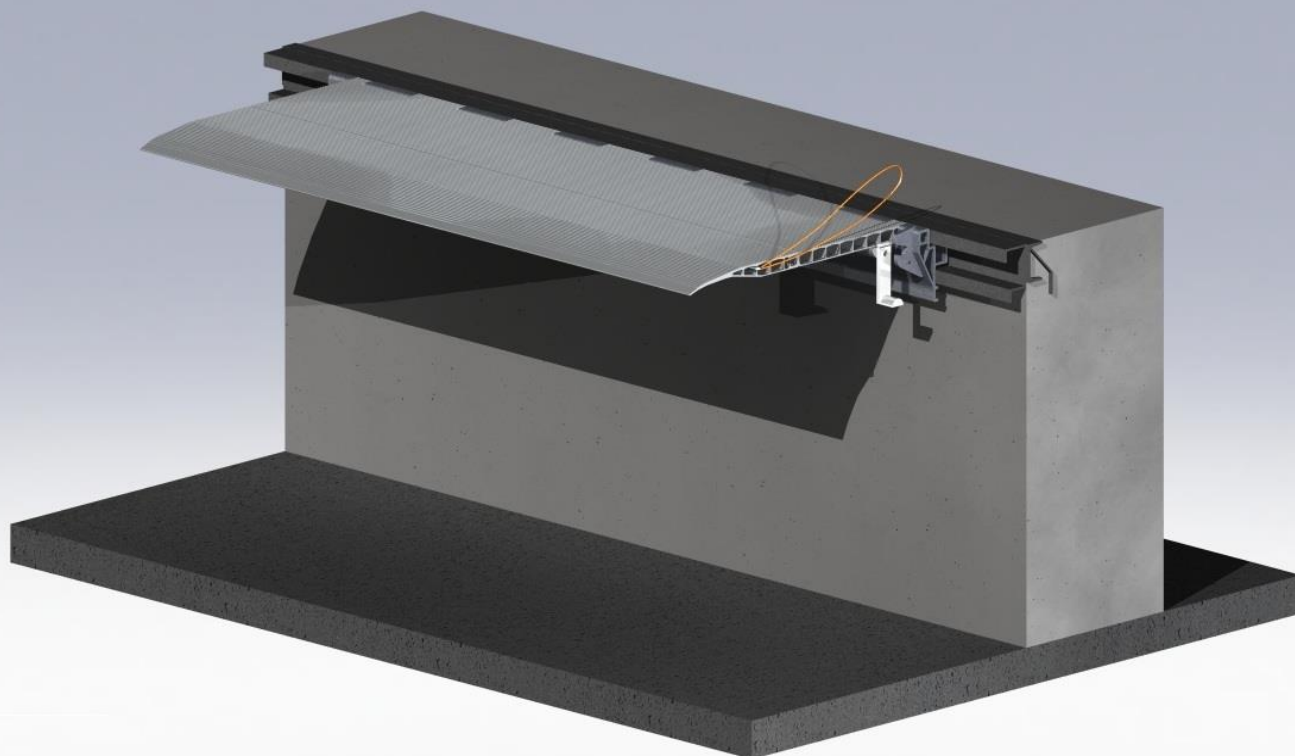


DETAILS:

Aluminum 6060 alloy extruded plate with 4000 kg capacity and antislip cross-ribbing surface treatment
 Faster sliding thanks to ball-bearing system on rails
 (see "SLIDING RAMPS INSTALLATION")
 Lateral positioning flexible rope
 Anti-falling block device in vertical position

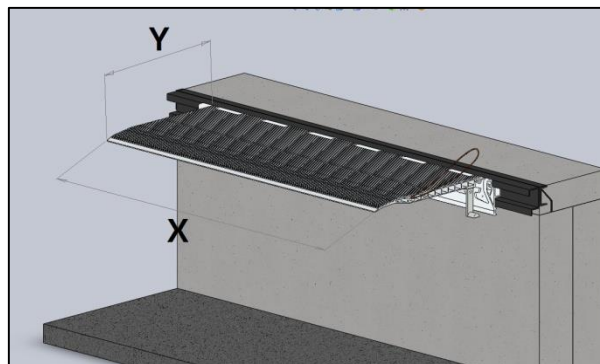

CAPACITY 4000 KG

H+/- difference in height calculated according to UNI EN 1398 standard for **12,5% gradient allowed for forklifts**

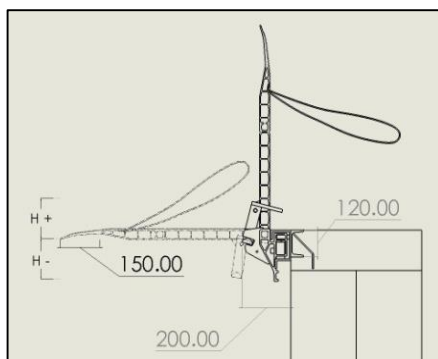

CODE	X	Y	WEIGHT (Kg)	H+/-
	(mm)	(mm)		(mm)
ES 40A	1650	400	42	50/50
ES 60A	1650	600	55	75/75
ES 80A	1650	800	68	100/100
ES 40B	2000	400	58	50/50
ES 60B	2000	600	65	200/180