

The logo for idomus, featuring the brand name in a bold, lowercase, sans-serif font inside a white rounded rectangle with a thin black border.

SECTIONAL DOOR “COMPACT+”




Sectional garage door IDO - COMPACT+ - the optimal solution for your home, when headroom for your sectional door is minimum 80 mm. These sectional door we produce exactly according to your individual measurements and personal needs. By creating this garage door model we carefully choose and tested all components, so IDO - COMPACT+ will serve you long and reliably. Maximum weight - 126 kg.

- Minimum headroom - 80 mm
- Fast and easy mounting
- Complies with standard EN 13241-1
- 15.000 opening-closing cycles
- Side springs
- Panels: Basic (Italy)
- Warranty - 2 years



CONSTRUCTION



40 MM

BASIC (ITALY) - closed contour panel made out of two steel supports, has a geometry to avoid the crush during the closing of the door, accordance with UNI EN 10326 and fill with high-density (40 +/- 4 kg/m³) polyurethane foam.

80 MM

HEADROOM - due to innovative construction, for the sectional door IDO - COMPACT+ requires less headroom height (min. 80 mm), and their installation is easier and faster.

15.000

WORKING CYCLES - sectional door IDO - COMPACT+ make up with galvanized tension springs, diameter 35 mm. Modern "spring in spring" technology is safe for customer and eligible in accordance with standard DIN 17223.

1,5 MM

THICK TRACKS of sheet metal witch are joined using the cold riveting method. During the manufacturing process we do not use welding, so the details of a protective galvanization remains intact.

SPECIFICATIONS


Door type	Residential
Maximum dimensions	4500 x 2500 mm ¹
Panel thickness, mm	40 mm
Thermal insulation, W/m ² K	0,58 W/m ² K
Air permeability	4 Class ^{1,2}
Resistance to wind load	4 - 5 Class ^{1,2}
Resistance to water penetration	3 Class
Sideroom	≥ 90 mm
Headroom	≥ 80 mm ³
Spring type	"Tension"
Spring place	Side
Cycles	min. 15 000
Spring failure safety devices included	"Spring in spring"
Warranty	2 years

¹ With wicket door 3750 x 2500 mm;

² With wicket door 2 klasè.

³ upper gasket is always mounted on the lintel.

COLORS

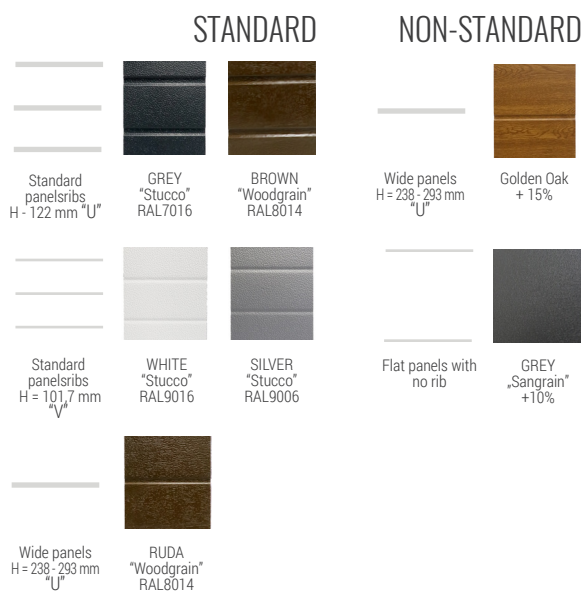

You can choose any colour from RAL color palette. We use fine quality German industrial bi-component polyurethane paint to ensure long colour lasting and low fading rate.