




D-311 CLEANROOM

**Gravity
driven**

low friction technology



inside door

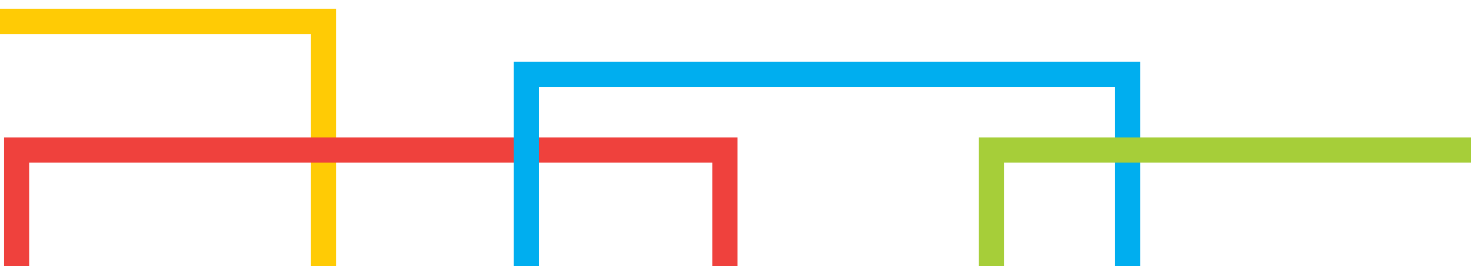

D-311 CLEANROOM


The D-311-Cleanroom LF is designed for inside applications re-quiring a limitation of leak flow and is ideal for interlocks. Its perfect sealing properties provide environmental control and protect your environment against drafts, dust and dirt. The patented «LF» (Low Friction) technology, combined with a frequency inverter driven motor, assures a smooth and silent operation for more user comfort.

- **OPENING SPEED:**
Up to 2,0 m/s.
- **PERFECT SEAL:**
Patented side guides and «BEAD» technology limit leak flow and allow energy savings.
- **SELF-REINSERTING WITHOUT INTERVENTION:**
The curtain automatically reinserts itself when dis-lodged. No repair costs, no production down time.
- **USER SAFETY:**
Flexible curtain without rigid elements.
- **COMFORT OF USE:**
DYNACO wireless detector at the bottom.
- **ADVANCED DRIVE:**
Frequency driven motor and encoder for smooth oper-ation and reliability. Wearing elements are reduced to a minimum.
- **DYNALOGIC CONTROL BOX:**
User-friendly control box with self-diagnosis.
- **CONFORM TO EN13241-1**

Pressure resistant



Low friction side guide

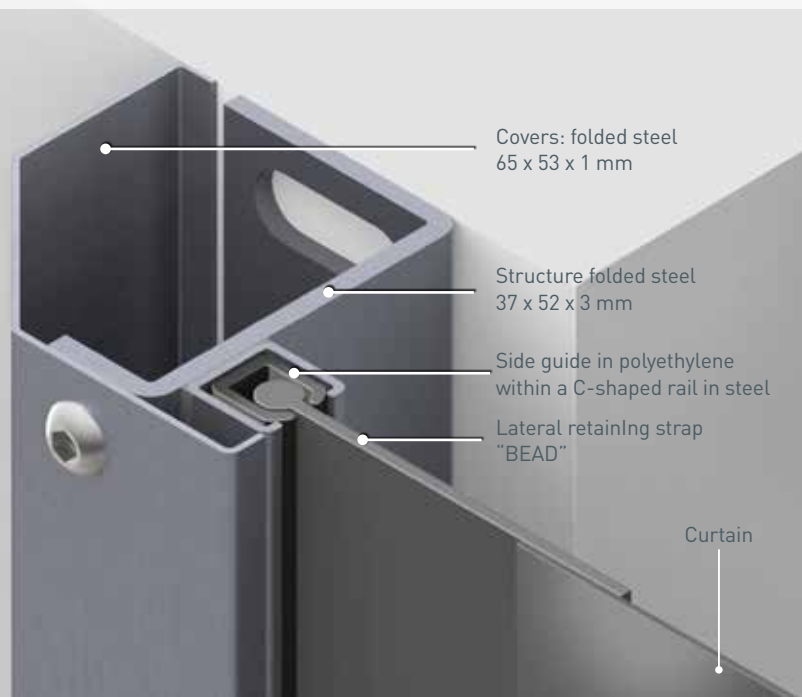

Gravity driven

low friction technology



























inside door

EN13241-1 STANDARDS

Standard	Ref.	Test acc.	Results
Water permeability	EN 12425	EN 12489	Class 2
Wind load	EN 12424	EN 12444	Class 1*
Wind permeability	EN 12426	EN 12427	3 (overpressure**) 1 (underpressure)
Safe openings	EN 12453	EN 12445	Pass
Mechanical resistance	EN 12604	EN 12605	Pass
Unintended movements	EN 12604	EN 12605	Pass
Thermal resistance	EN 12428	EN 12428	6,02 W/m ² K
Performance (cycles)	EN 12604	EN 12605	1.000.000

* Interior applications only


CHARACTERISTICS

Max. dimensions	W 4.000 mm x H 4.000 mm																
Opening speed Closing speed	up to 1,2 m/s (optional 2,0 m/s) 0,5 m/s																
Structure	Folded steel 37 x 52 x 3 mm, galvanised before cutting and folding. Full covers standard. Option: stainless steel																
Drum	Steel - Ø 102 x 2 mm.																
Side guides	Reinforced polyethylene (PE-UHMW1000)																
Motor	2 poles, without brake. Power 0,75 kW. IP rating: IP 65																
Control box	DYNALOGIC provided with: Circuit breaker, general divider, adjustable timer, push button for opening and reset and emergency stop. IP rating: IP 54. Frequency inverter.																
Standard detectors	Infrared barrier: 300 mm from the floor. Wireless DYNACO detector (WDD) DBD: correct unwinding detector																
Power supply Frequency	Single phase 230 V - 14 A. Frequency: 50-60 Hz																
Advised operating temperature	+ 5 °C up to + 40 °C																
Available colours comparable with:	<table border="0"> <tr> <td>Yellow RAL1003</td> <td></td> <td>Green RAL6005</td> <td></td> </tr> <tr> <td>Orange RAL2004</td> <td></td> <td>Grey RAL7035</td> <td></td> </tr> <tr> <td>Red RAL3000</td> <td></td> <td>White RAL9010</td> <td></td> </tr> <tr> <td>Blue RAL5002</td> <td></td> <td>Black RAL9005</td> <td></td> </tr> </table>	Yellow RAL1003		Green RAL6005		Orange RAL2004		Grey RAL7035		Red RAL3000		White RAL9010		Blue RAL5002		Black RAL9005	
Yellow RAL1003		Green RAL6005															
Orange RAL2004		Grey RAL7035															
Red RAL3000		White RAL9010															
Blue RAL5002		Black RAL9005															
[Actual colours may deviate. Colour samples available upon request]																	


** Overpressure - underpressure



Improved sealing

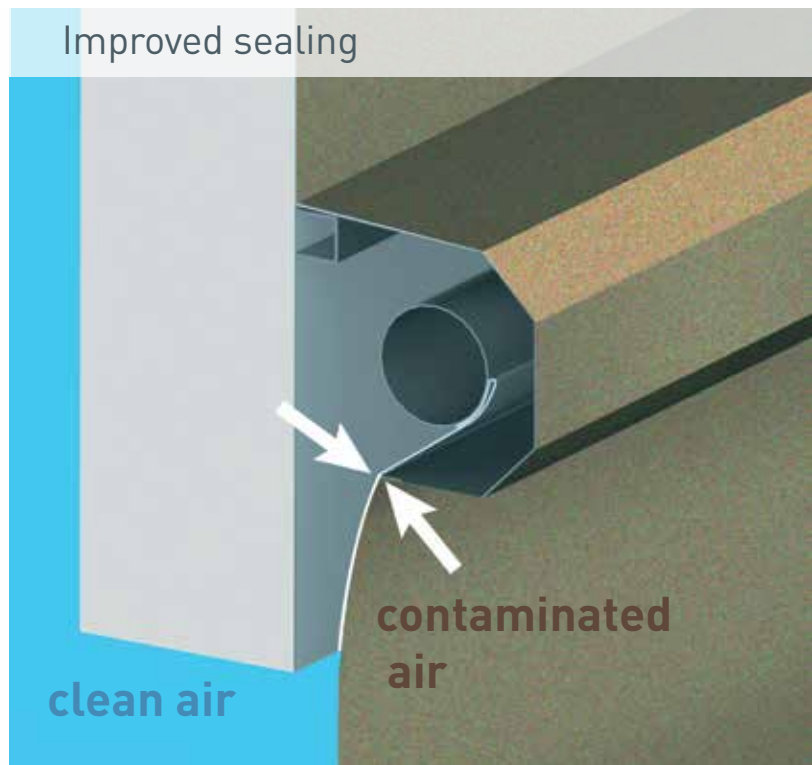

Dimensions and installation requirements D-311 Cleanroom

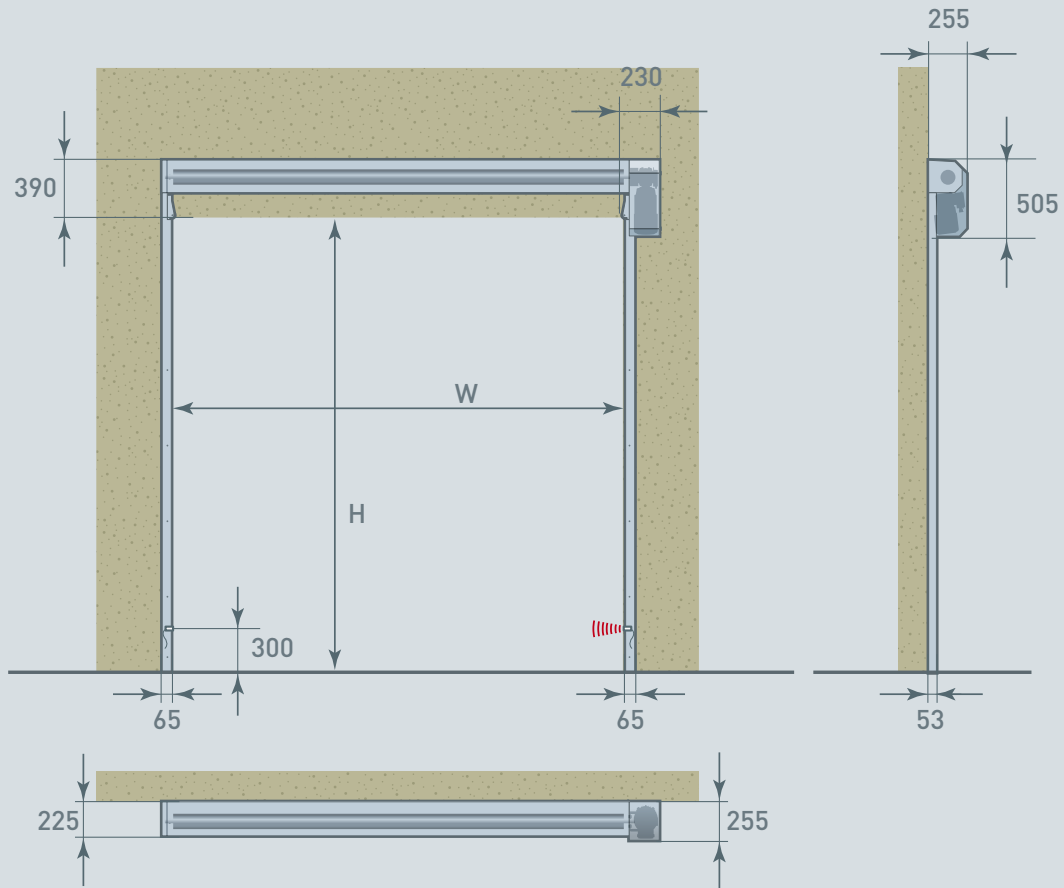

All indicated dimensions are based on exact width and height dimensions only. The space necessary for mounting and maintenance has to be provided.

REMARK: Based on the risk analysis of the environment, extra push buttons, detectors and covers might be required.